


Series KQ2

Extended Male Elbow: KQ2W



Applicable tubing O.D. (inch)	Connection thread NPT	Model	H (Width across flats)	Note) $\phi D1$	$\phi D2$	L1	L2	A*	M	Min. port size	Mass (g)
1/8	1/8	KQ2W01-34S	11.11	9.6	10	17.5	36.1	38	15.5	2.5	19
	1/4	KQ2W01-35S	14.29				42.5	42			41
5/32	1/8	KQ2W03-34S	11.11	10.4	10	18	36.6	38.5	16	3	19
	1/4	KQ2W03-35S	14.29				43	42.5			41
3/16	1/8	KQ2W05-34S	11.11	11.4	10	19.5	37.1	40	16.5	3.5	41
	1/4	KQ2W05-35S	14.29				43.5	43.5			19
1/4	1/8	KQ2W07-34S	11.11	13.2	10	20.5	39.6	43	17	4.6	20
	1/4	KQ2W07-35S	14.29				46	47			42
	3/8	KQ2W07-36S	17.46				47.4	49			69
5/16	1/8	KQ2W09-34S	12.7	15.2	12	23.5	42.6	47	18.5	6	30
	1/4	KQ2W09-35S	14.29				49	51			47
	3/8	KQ2W09-36S	17.46				50.4	53			74
3/8	1/4	KQ2W11-35S	17.46	17.9	17	25.5	55.5	59	21	7	69
	3/8	KQ2W11-36S	17.46				56.9	61			76
	1/2	KQ2W11-37S	22.23				63.6	65.5			147
1/2	1/4	KQ2W13-35S	17.46	21.7	17	28	57.5	63	22	9	72
	3/8	KQ2W13-36S	17.46				58.9	64.5			78
	1/2	KQ2W13-37S	22.23				65.6	69			149

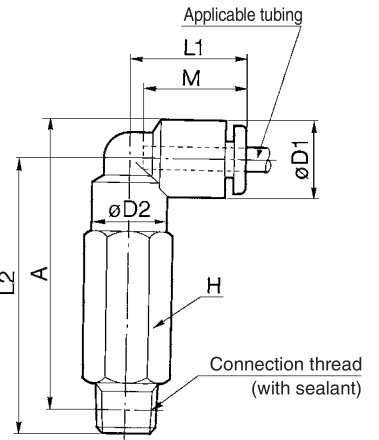

* Reference dimensions after NPT thread installation.
Note) $\phi D1$: Max. diameter




Male Branch Tee: KQ2T

<10-32 UNF>




Applicable tubing O.D. (inch)	Connection thread UNF NPT	Model	H (Width across flats)	Note) $\phi D1$	$\phi D2$	L1	L2	A	M	Min. port size	Mass (g)	
1/8	10-32 UNF	KQ2T01-32	7	8.4	-	15.3	13.2	14.4	12.7	2.3	3.2	
	1/16	KQ2T01-33S	11.11	9.6	10	17.5	21.5	22.5*	15.5	2.5	10	
	1/8	KQ2T01-34S					20.6					
	1/4	KQ2T01-35S	14.29				25	24.5*			20	
5/32	10-32 UNF	KQ2T03-32	7	9.3	-	15.6	13.7	15.4	12.7	2.3	3.5	
	1/16	KQ2T03-33S	11.11	10.4	10	18	22	23*	16	3	10	
	1/8	KQ2T03-34S					21.1					
	1/4	KQ2T03-35S	14.29				25.5	25*			20	
3/16	1/8	KQ2T05-34S	11.11	11.4	10	19.5	21.6	24*	16.5	3.5	12	
	1/4	KQ2T05-35S	14.29				26	26*			21	
1/4	10-32 UNF	KQ2T07-32	7	12	-	16.1	15.1	18.1	13.6	2.3	4.4	
	1/8	KQ2T07-34S	11.11	13.2	10	20.5	22.6	26*	17	4.6	11	
	1/4	KQ2T07-35S	14.29				27	28*			21	
	3/8	KQ2T07-36S	17.46				28.4	30*			34	
5/16	KQ2T09-34S	12.7									23.6	28*
5/16	1/4	KQ2T09-35S	14.29	15.2	12	23	28	30*	18.5	6	23	
	3/8	KQ2T09-36S	17.46				29.4	31.5*			35	
	1/2	KQ2T11-34S	17.46									25.6
3/8	1/4	KQ2T11-35S	17.46	17.9	17	25.5	29	32.5*	21	7	29	
	3/8	KQ2T11-36S					30.4	34.5*			38	
	1/2	KQ2T11-37S					22.23	34.6			36.5*	64
	1/4	KQ2T13-35S					17.46					
1/2	3/8	KQ2T13-36S	17.46	21.7	17	28	32.4	38.5*	22	9.6	43	
	1/2	KQ2T13-37S	22.23				36.6	40*			69	

<10-32 UNF>

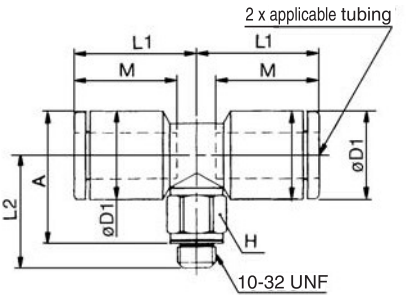

<NPT>

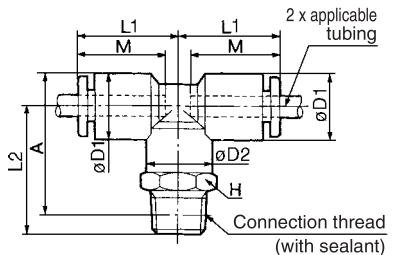

* Reference dimensions after NPT thread installation.

Note) $\phi D1$: Max. diameter



Union Tee: KQ2T



Applicable tubing O.D. (inch)	Model	Note) ϕD	L	Q	M	Min. port size	Mass (g)
1/8	KQ2T01-00	9.6	17.5	4.3	15.5	2.5	5
5/32	KQ2T03-00	10.4	18	4.5	16	3	4
3/16	KQ2T05-00	11.4	19.5	4.8	16.5	3.5	7
1/4	KQ2T07-00	13.2	20.5	5.3	17	4.6	8
5/16	KQ2T09-00	15.2	23	6	18.5	6	11
3/8	KQ2T11-00	17.9	26	6.6	21	7	18
1/2	KQ2T13-00	21.7	29	7.8	22	9.6	26

Note) ϕD : Max. diameter

