




FRT/FRN-K2 and FRT/FRN-F2




Technical Data

Max. weight: 0.116 kg
Material: Polycarbonate plastic, steel shaft
Operating temperature range: 0 °C to 50 °C

FRT-K2 and -F2 (at 23 °C)

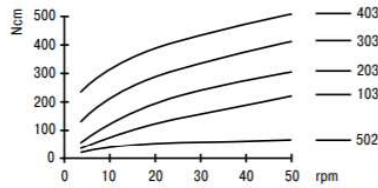

FRT-K2 and -F2 (at 20 rpm)

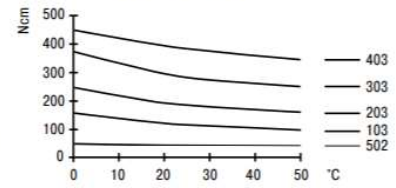

Bidirectional Damping	Right-Hand Damping (clockwise)	Left-Hand Damping (anti-clockwise)	Nominal 20 rpm, 23 °C
			Damping Torque Ncm
FRT-K2-502	FRN-K2-R502	FRN-K2-L502	50 +/- 10
FRT-K2-103	FRN-K2-R103	FRN-K2-L103	100 +/- 20
FRT-F2-203	FRN-F2-R203	FRN-F2-L203	200 +/- 40
FRT-F2-303	-	-	300 +/- 80
FRT-F2-403	-	-	400 +/- 100