



Dimensions and part numbers

STEEL COUPLERS

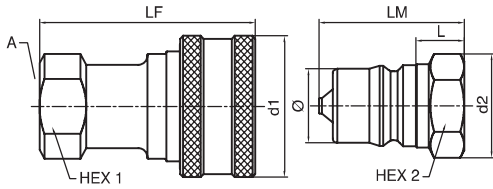

Body size inch	Thread A inch	d1 mm	Hex 1 inch	LF mm	d2 mm	Hex 2 inch	L mm	LM mm	Ø mm	Part number female body	Weight gr./piece	Part number male tip	Weight gr./piece
Female BSPP thread													
1/8"	1/8	24.4	11/16"	48.3	16.4	9/16"	10.5	32.0	10.8	H1-62-BSPP	81	H1-63-BSPP	18
1/4"	1/4	29.0	13/16"	61.2	21.9	3/4"	16.6	42.9	14.2	H2-62-BSPP	130	H2-63-BSPP	38
3/8"	3/8	35.6	1"	69.9	25.7	7/8"	19.7	49.3	19.1	H3-62-BSPP	241	H3-63-BSPP	68
1/2"	1/2	45.0	1 1/8"	77.5	32.9	1 1/8"	21.1	54.1	23.5	H4-62-BSPP	360	H4-63-BSPP	122
3/4"	3/4	54.4	1 5/16"	93.2	40.3	1 3/8"	21.9	64.5	31.4	H6-62-BSPP	602	H6-63-BSPP	217
1"	1	64.0	1 5/8"	106.2	47.2	1 5/8"	25.2	73.8	37.7	H8-62-BSPP	906	H8-63-BSPP	341

Female NPTF thread													
1/8"	1/8 - 27	24.4	11/16"	48.3	16.5	9/16"	11.2	32.0	10.8	H1-62	81	H1-63	18
1/4"	1/4 - 18	29.0	13/16"	57.4	21.9	3/4"	14.0	39.1	14.2	H2-62	138	H2-63	36
3/8"	3/8 - 18	35.4	7/8"	63.2	25.6	7/8"	13.1	42.7	19.1	H3-62	184	H3-63	56
1/2"	1/2 - 14	45.0	1 1/8"	72.9	33.0	1 1/8"	17.5	49.3	23.5	H4-62	341	H4-63	109
3/4"	3/4 - 14	54.4	1 5/16"	90.4	40.3	1 3/8"	20.1	61.7	31.4	H6-62	592	H6-63	210
1"	1 - 11 1/2	64.0	1 5/8"	106.2	47.8	1 5/8"	33.4	73.9	37.7	H8-62	914	H8-63	351

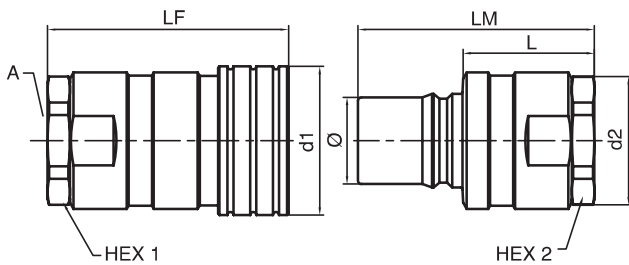

Body size inch	Thread A inch	d1 mm	Hex 1 inch	LF mm	d2 mm	Hex 2 inch	L mm	LM mm	Ø mm	Part number female body	Part number male tip
Female BSPP thread											
1 1/2"	1 1/4	76.2	2 3/8"	123.4	69.9	2 3/8"	67.5	120.9	44.5	H12-62L-BSPP	H12-63L-BSPP
	1 1/2	76.2	2 3/8"	127.3	69.9	2 3/8"	71.1	124.7	44.5	H12-62N-BSPP	H12-63N-BSPP
2 1/2"	2	104.1	3 3/4"	145.0	104.1	3 3/4"	69.4	142.7	63.2	H2016-62-BSPP	H2016-63-BSPP
Female NPTF thread											
1 1/2"	1 1/4 - 11 1/2	76.2	2 3/8"	123.4	69.9	2 3/8"	67.3	120.9	44.5	H12-62L	H12-63L
	1 1/2 - 11 1/2	76.2	2 3/8"	123.4	69.9	2 3/8"	67.3	120.9	44.5	H12-62N	H12-63N
2 1/2"	2 - 11 1/2	104.1	3 3/4"	141.5	104.1	3 3/4"	65.9	139.2	63.2	H2016-62	H2016-63
	2 1/2 - 8	104.1	3 3/4"	153.4	104.1	3 3/4"	83.4	151.1	63.2	H2020-62	H2020-63

Note : Quick couplings with UNF thread are also available upon request. Please consult us for these configurations.