



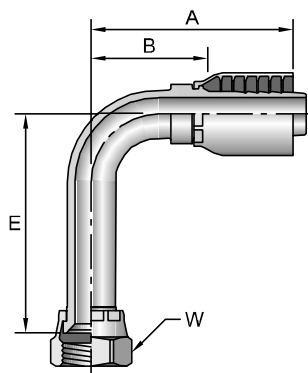

14143

Female JIC 37° - Swivel - 0° Elbow - Long Drop


#	Thread	Hose I.D.	A	E		B
Part Number	inch	inch	inch mm	inch mm	inch	inch mm
14143-4-4	1/4 7/16x20	1/4	1.96 50	1.81 46	9/16	1.21 31
14143-5-4	5/16 1/2x20	1/4	1.93 49	1.80 46	5/8	1.18 30
14143-6-6	3/8 9/16x18	3/8	2.27 58	2.18 55	11/16	1.27 32
14143-8-6	1/2 3/4x16	3/8	2.56 65	2.43 62	7/8	1.56 40
14143-8-8	1/2 3/4x16	1/2	2.62 67	2.52 64	7/8	1.36 35
14143-10-8	5/8 7/8x14	1/2	2.78 71	2.58 66	1	1.52 39
14143-10-10	5/8 7/8x14	5/8	3.16 80	2.58 66	1	1.75 44
14143-12-12	3/4 1-1/16x12	3/4	3.49 89	3.74 95	1-1/4	2.05 52
14143-14-12	7/8 1-3/16x12	3/4	3.38 86	3.93 100	1-3/8	1.95 50
14143-16-16	1 1-5/16x12	1	3.90 99	4.32 110	1-1/2	2.31 59
14143-20-20	1-1/4 1-5/8x12	1-1/4	4.39 112	5.28 134	2	2.73 69

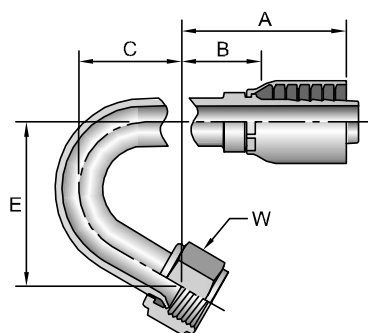

14 43

Female JIC 37° - Swivel - 150° Elbow


#	Thread	Hose I.D.	A	C	E		B
Part Number	inch	inch	inch mm	inch mm	inch mm	inch	inch mm
14V43-6-4	3/8 9/16x18	1/4	2.89 73	1.36 34	1.97 50	11/16	2.16 55



10443

Male SAE 45° - Rigid

#	Thread	Hose I.D.	A	H	B
Part Number	inch	inch	inch mm	inch	inch mm
10443-6-6	3/8 5/8x18	3/8	2.21 56	3/4	1.21 31
10443-12-12	3/4 1-1/16x14	3/4	3.20 81	1-1/8	1.77 45



10843

Female SAE 45° - Swivel

#	Thread	Hose I.D.	A	H	H	B
Part Number	inch	inch	inch mm	inch	inch	inch mm
10843-6-4	3/8 5/8x18	1/4	2.11 54	3/4	3/4	1.36 35
10843-6-6	3/8 5/8x18	3/8	2.38 60	3/4	3/4	1.35 34
10843-12-12	3/4 1-1/16x14	3/4	3.17 81	1-1/16	1-1/4	1.73 44

Notch on nut signifies SAE 45° flare.