

SUPER QUIET FLOW ECONOMY PNEUMATIC SILENCER MUFFLERS

A new concept in muffler design incorporates a 50 mesh, self-cleaning, stainless steel screen in a strong, protective glass-filled nylon housing which is ultrasonically welded for maximum strength.

This unit offers greater flow with less pressure drop than the ASP Series, while reducing noise levels. See performance charts for flow information and sound characteristics.


Maximum operating pressure: 150 PSI
Operating temperatures: 35°F to 120°F




Part No.	NPT	Overall Length	Diameter	Weight lbs.
SQF-1	1/8"	2 7/64"	13/16"	.02
SQF-2	1/4"	2 15/64"	13/16"	.03
SQF-3	3/8"	3 27/64"	1 1/4"	.09
SQF-4	1/2"	3 35/64"	1 1/4"	.09

Sound Characteristics – Pneumatic Silencers / Mufflers


SQF-1 & ASQF-1
dB Rating vs. Air Flow

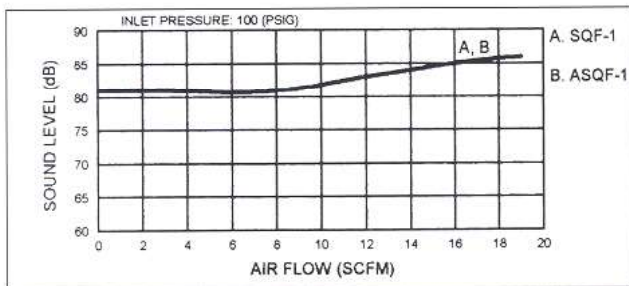


SQF-2 & ASQF-2
dB Rating vs. Air Flow

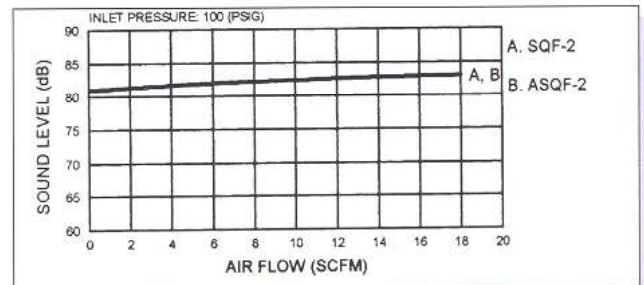


SQF-3 & ASQF-3
dB Rating vs. Air Flow

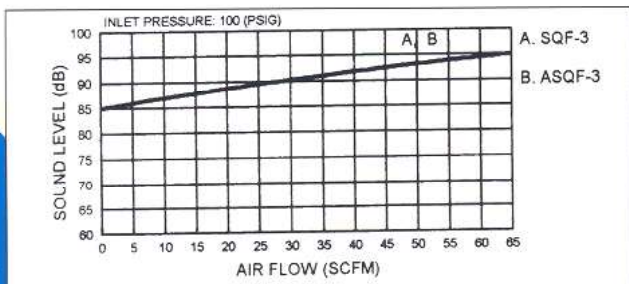

SQF-4 & ASQF-4
dB Rating vs. Air Flow

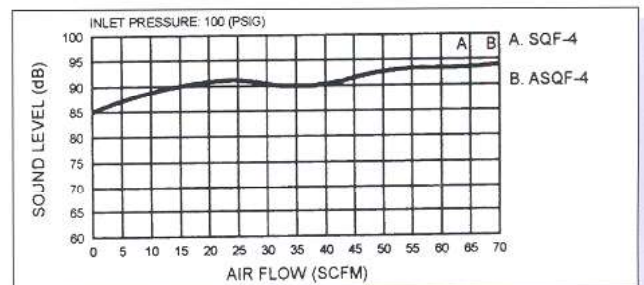

ASQF-6
dB Rating vs. Air Flow

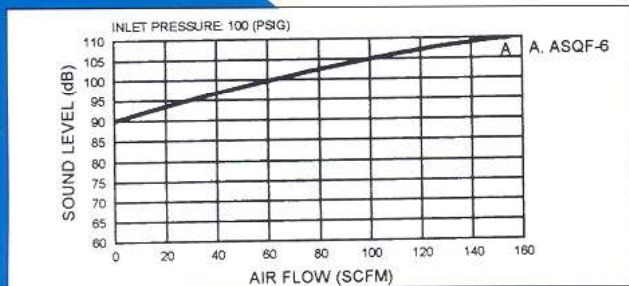

ASQF-8
dB Rating vs. Air Flow

