


HF HeadlineFilters

Filter Element: 25-64-60C

Technical Specification	
Description	Disposable Coalescing Filter Element
Materials of Construction	Borosilicate Glass Microfibres bonded with Kynar fluorocarbon (P.V.D.F.) resin
Filtration Efficiency	Better than 99.5+% removal of 0.1 micron particles and aerosols
Air Flow Resistance	Less than 1.0kPa at 6 m/min in air at 25°C
Dimensions	I.D. - 25.0mm ± 0.25mm
	O.D. - 38.0mm ± 1.5mm
	Length - 64.0mm ± 0.25mm
Strength (dry)	Burst minimum - 5.0 Bar
	Collapse minimum - 2.0 Bar
Temperature Resistance	-50°C to +150°C maximum in air
Chemical Resistance	Resistant to all mineral, vegetable
	And synthetic compressor lubricants
	Consult chemical resistance chart for
	Other gases and liquids

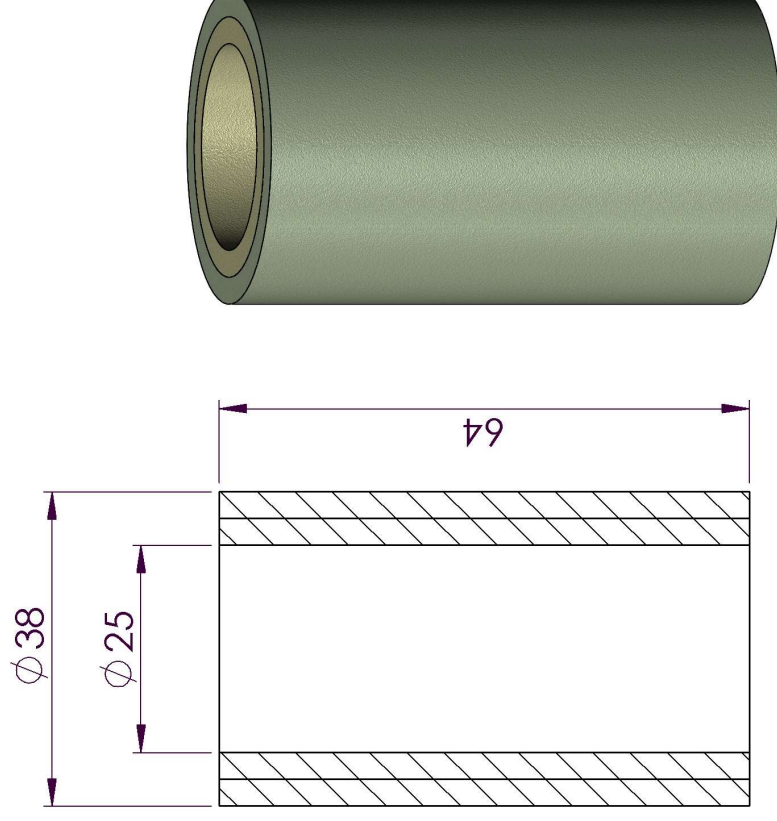

For further specific information please contact our Technical Department
This is a guide only

Headline Filters Limited Mill Hall Business Estate
Aylesford
Kent, ME20 7JZ
www.headlinefilters.com
info@headlinefilters.com

**DO NOT SCALE DRAWING
IF IN DOUBT ASK**

Filter Element: 25-64-60C

Material:
Borosilicate Glass
Microfibres bonded
with Kynar fluorocarbon
(P.V.D.F.) resin



THE COPYRIGHT OF THIS DRAWING IS
RESERVED BY HEADLINE FILTERS. IT
IS ISSUED ON CONDITION THAT IT IS
NOT COPIED, REPRODUCED OR
DISCLOSED TO A THIRD PARTY
EITHER WHOLLY, OR IN PART
WITHOUT CONSENT IN WRITING.