




Part Number: DIF-BK50

Technical Specification	
Description	Disposable In-line Filter
Materials of Construction	PVDF with Borosilicate Glass filter element bonded with fluorocarbon
Filtration Efficiency	Better than 99.99+% removal of 0.1 micron particles
Max Pressure Drop	1 Bar
Dimensions	O.D. - 25.40 ± 1.5mm
	Length - 82.25 ± 0.25mm
Flow Rate-	Air flow Nm ³ /hr at 0.1 Bar pressure drop
	0.1Bar 1Bar 2Bar 4Bar 7Bar 10Bar
	1.4 2.6 3.9 6.4 10 14
Max Temperature	At 0 Bar pressure 110°C
Max Pressure	At 40°C 7 Bar

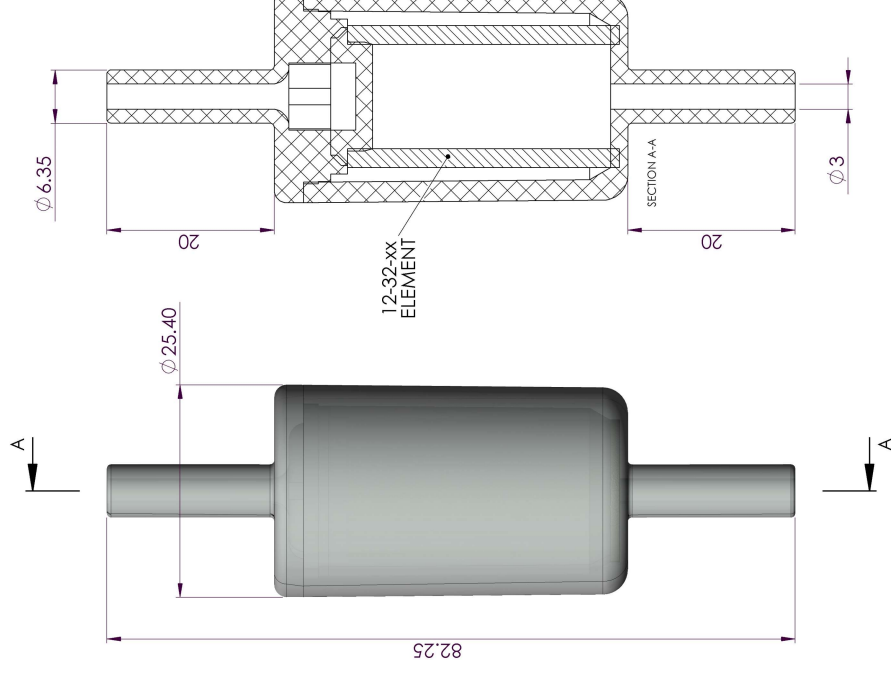

For further specific information please contact our Technical Department
This is a guide only

Headline Filters Limited Mill Hall Business Estate Aylesford Kent, ME20 7JZ www.headlinefilters.com info@headlinefilters.com	Part Number: DIF-BK50	
	Material: PVDF with Borosilicate Glass filter element bonded with fluorocarbon	
DO NOT SCALE DRAWING IF IN DOUBT ASK		

THE COPYRIGHT OF THIS DRAWING IS
RESERVED BY HEADLINE FILTERS. IT
IS ISSUED ON CONDITION THAT IT IS
NOT COPIED, REPRODUCED OR
DISCLOSED TO A THIRD PARTY
EITHER WHOLLY, OR IN PART
WITHOUT CONSENT IN WRITING.