

Blowgun Kits

Ready for use, **simple** and **ergonomic**, the Parker Legris blowgun kit remains an essential item of equipment for any blowing or spraying operation in the industrial environment.

Product Advantages

Ready for Use

Kit contents:

- one blowgun
- a 4 metre recoil tube
- one R1/4 threaded fitting, external diameter 8 mm

Easy to install and comfortable to use
Wide range of models and nozzles for optimum flow
Lower or upper connection
Labelling and colours can be customised
Packaging designed to facilitate self-service sales

Safety & Performance

Safe operation with the Safety or OSHA models
Durable, shock-resistant materials
100% leak and flow-tested in production
Date coding to guarantee quality and traceability
Minimum pressure drop
Optimisation of your energy consumption with the Energy-Saving model



Manufacturing Workshops
Cleaning
Blowing
Mixing
Ejection
Cooling
Packaging

Applications

Technical Characteristics

Compatible Fluids	Compressed air Other fluids: contact us
Working Pressure	0 to 10 bar
Working Temperature	Air: -15°C to +50°C Dry air: -20°C to +80°C
Tubes	Recoil tubing

Regulations

Compliance for all blowguns:

DI: 97/23/EC (PED)
DI: 2002/95/EC (RoHS),
2011/65/EC
DI: 1907/2006 (REACH)

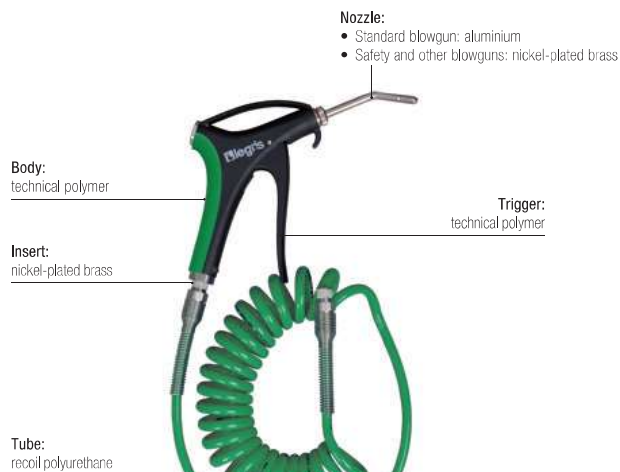
Protection of design

All designs and models of Parker Legris blowguns have been registered with the following numbers:
13224 / 13225 / 13226.

Compliance for specific blowguns:

DI: 1910,242 (b) [OSHA]
The static pressure must be less than 30 psi in case the nozzle becomes blocked.
DI: 1910,95 (b) [OSHA]
The noise level must be less than 90 dBA over 8 hours' exposure.
DI: 2003/10/EC
Regulation relating to exposure to noise, particularly with regard to risks to hearing. The noise level must be less than 87 dBA.

Component Materials



Silicone-free


Customisation on request

- Marking
- Kit contents adaptable to your applications
- Additional functions
- Colour




Blowgun Kits


0631..09 Blowgun Kit, Lower Connection, Male BSPT Thread

	Technical polymer, nickel-plated brass, treated aluminium, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 09	16	192,5	139,5	152	0,441
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0659 00 13).						


0631..01 Safety Blowgun Kit, Lower Connection, Male BSPT Thread

	Technical polymer, nickel-plated brass, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 01	16	198,5	148,5	154	0,575
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0654 00 13).						

0631..23 Energy Saving Blowgun Kit with Angled Nozzle, Male BSPT Thread


	Technical polymer, nickel-plated brass, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 23	16	195	148,5	154	0,456
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0653 66 13). External diameter of tube 6 mm						

0631..03 Blowgun Kit, Lower Connection with Standard Nozzle, Male BSPT Thread


	Technical polymer, nickel-plated brass, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 03	16	165	148,5	99	0,528
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0651 66 13).						

Blowgun Kits


0631..02 Blowgun Kit, Upper Connection with Standard Nozzle, Male BSPT Thread

	Technical polymer, nickel-plated brass, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 02	16	163	148,5	101	0,524
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0658 66 13).						


0631..05 Blowgun Kit Lower Connection with Short Angled Nozzle, Male BSPT Thread

	Technical polymer, nickel-plated brass, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 05	16	195,5	148,5	163	0,536
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0656 66 13).						

0631..04 Blowgun Kit, Lower Connection with Short Angled Nozzle, Male BSPT Thread


	Technical polymer, nickel-plated brass, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 04	16	195	148,5	163,5	0,516
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0657 66 13).						

0631..07 Blowgun Kit, Lower Connection with Interchangeable Nozzle, Male BSPT Thread


	Technical polymer, nickel-plated brass, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 07	16	163	148,5	91	0,617
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0656 66 13). Delivered without nozzle.						

Blowgun Kits

0631..06 Blowgun Kit, Upper Connection with Interchangeable Nozzle, Male BSPT Thread

	Technical polymer, nickel-plated brass, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 06	16	161,5	148,5	93	0,501
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0655 66 13). Delivered without nozzle.						

0631..08 Energy Saving Blowgun Kit, Lower Connection, Interchangeable Nozzle, Male BSPT Thread

	Technical polymer, nickel-plated brass, NBR, polyurethane tubing 	C		F	H	H1	L	kg
		R1/4	0631 00 08	16	163	148,5	91	0,496
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0653 66 13). Delivered without nozzle.						