


## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

<b>Creation Date:</b>	17-12-2018
<b>Datasheet No:</b>	DS854W
<b>Parker Part No:</b>	938169Q
<b>OEM:</b>	Internormen / Eaton
<b>OEM Part No:</b>	01.E320.25VG.16.S.V

### Product Dimensions

<b>A (mm)</b>	70.0	<b>(inch)</b>	2.76
<b>C (mm)</b>	41.0	<b>(inch)</b>	1.61
<b>D (mm)</b>	70.0	<b>(inch)</b>	2.76
<b>E (mm)</b>	304.0	<b>(inch)</b>	11.97

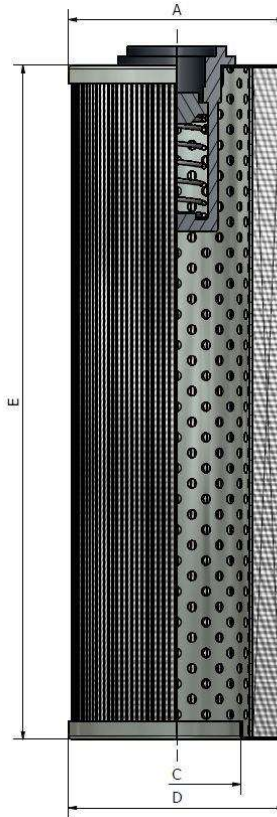

### Construction Materials

<b>Seal(s):</b>	FPM: Fluoroelastomer
<b>Top Endcap:</b>	Mild steel tin plated
<b>Bottom Endcap:</b>	Mild steel tin plated
<b>Inner Support Cylinder:</b>	Mild steel tin plated
<b>Filter Media:</b>	Multilayer fibreglass with coated mesh on both sides

### Calculated Performance Criteria

<b>Differential Pressure (<math>\Delta p</math>):</b>	0.25 bar @ 300 l/min
<b>Tested to ISO3968 @ 32 cSt</b>	3.60 psi @ 65.99 gpm
<b>Efficiency:</b>	>Beta 200 @ 20 microns & greater >Beta 1000 @ 22 microns & greater
<b>Minimum Collapse Pressure:</b>	>15 bar
<b>Tested to ISO2941</b>	>218 psi
<b>Dirt Holding Capacity acc. to ISO16889</b>	>43.3 gram @ 7 bar terminal pressure drop >43.3 gram @ 102 psi terminal pressure drop