


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	17-12-2018
Datasheet No:	DS876W
Parker Part No:	938191Q
OEM:	Internormen / Eaton
OEM Part No:	01.E425.6VG.16.S.V

Product Dimensions

A (mm)	83.0	(inch)	3.27
C (mm)	45.0	(inch)	1.77
D (mm)	83.0	(inch)	3.27
E (mm)	304.0	(inch)	11.97

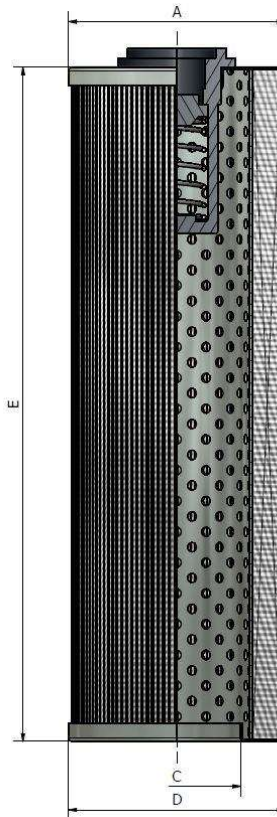

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Mild steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0.37 bar @ 300 l/min
Tested to ISO3968 @ 32 cSt	5.37 psi @ 65.99 gpm
Efficiency:	>Beta 200 @ 6 microns & greater >Beta 1000 @ 7 microns & greater
Minimum Collapse Pressure:	>15 bar
Tested to ISO2941	>218 psi
Dirt Holding Capacity acc. to ISO16889	>92.5 gram @ 7 bar terminal pressure drop >92.5 gram @ 102 psi terminal pressure drop