PAR FIT™

Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	17-12-2018
Datasheet No:	DS889W
Parker Part No:	938220Q
OEM:	Internormen / Eaton
OEM Part No:	01.E360.10VG.30.E.V

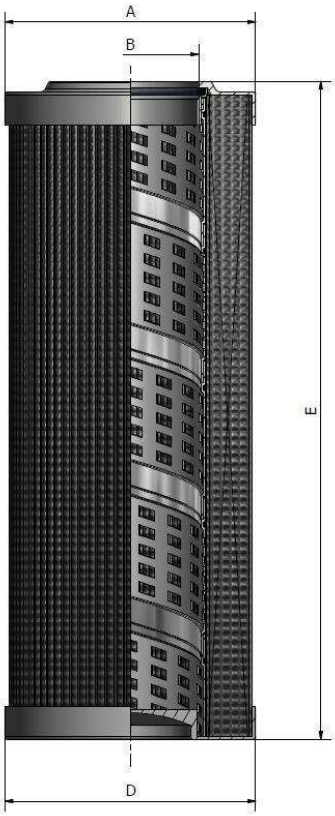

Product Dimensions

A (mm)	60.0	**(inch)**	2.36
B (mm)	34.2	**(inch)**	1.35
D (mm)	60.0	**(inch)**	2.36
E (mm)	310.0	**(inch)**	12.20

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Mild steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp): 0.44 bar @ 400 l/min
Tested to ISO3968 @ 32 cSt 6.38 psi @ 87.99 gpm

Efficiency: >Beta 200 @ 10 microns & greater
>Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >20 bar
Tested to ISO2941 >290 psi

Dirt Holding Capacity acc. to ISO16889
>38.5 gram @ 7 bar terminal pressure drop
>38.5 gram @ 102 psi terminal pressure drop