

## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

**Creation Date:** 17-12-2018

**Datasheet No:** DS468W


**Parker Part No:** 939762Q

**OEM:** Argo

**OEM Part No:** V2.1260-26

### Product Dimensions

<b>A (mm)</b>	118.0	<b>(inch)</b>	4.65
<b>B (mm)</b>	59.5	<b>(inch)</b>	2.34
<b>C (mm)</b>	59.5	<b>(inch)</b>	2.34
<b>D (mm)</b>	118.0	<b>(inch)</b>	4.65
<b>E (mm)</b>	600.0	<b>(inch)</b>	23.62

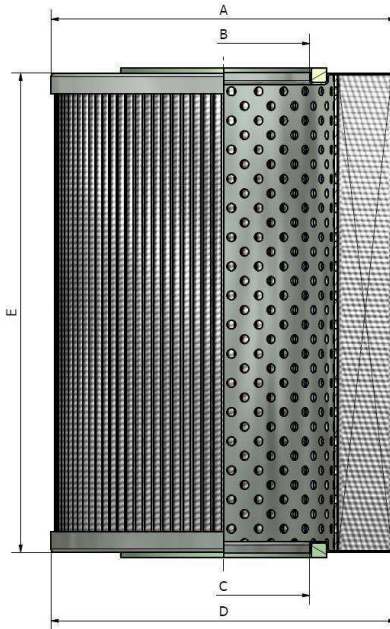

### Construction Materials

<b>Seal(s):</b>	NBR: Perbunan
<b>Top Endcap:</b>	Mild steel zinc plated
<b>Bottom Endcap:</b>	Mild steel zinc plated
<b>Inner Support Cylinder:</b>	Mild steel zinc plated
<b>Filter Media:</b>	Multilayer fibreglass with coated mesh on both sides

### Calculated Performance Criteria

<b>Differential Pressure (<math>\Delta p</math>):</b>	0.00 bar @ 0 l/min
<b>Tested to ISO3968 @ 32 cSt</b>	0.00 psi @ 0.00 gpm
<b>Efficiency:</b>	>Beta 200 @ 10 microns & greater >Beta 1000 @ 12 microns & greater
<b>Minimum Collapse Pressure:</b>	>10 bar
<b>Tested to ISO2941</b>	>145 psi
<b>Dirt Holding Capacity acc. to ISO16889</b>	>266.0 gram @ 5 bar terminal pressure drop >266.0 gram @ 73 psi terminal pressure drop