


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	17-12-2018
Datasheet No:	DS1635W
Parker Part No:	940135Q
OEM:	Donaldson
OEM Part No:	P173081 (5 micron)

Product Dimensions

A (mm)	152.0	(inch)	5.98
B (mm)	100.0	(inch)	3.94
C (mm)	100.0	(inch)	3.94
D (mm)	152.0	(inch)	5.98
E (mm)	647.0	(inch)	25.47

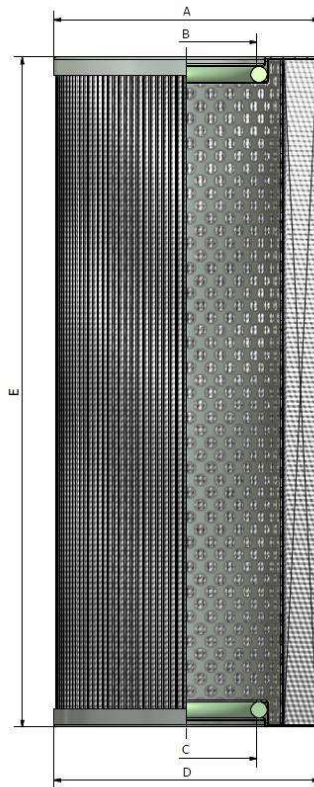

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Mild steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	bar @ l/min
Tested to ISO3968 @ 32 cSt	psi @ gpm
Efficiency:	>Beta 200 @ 6 microns & greater >Beta 1000 @ 7 microns & greater
Minimum Collapse Pressure:	>5 bar
Tested to ISO2941	>73 psi
Dirt Holding Capacity acc. to ISO16889	382.0 gram @ 5 bar terminal pressure drop 382.0 gram @ 73 psi terminal pressure drop