

## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

**Creation Date:** 17-12-2018

**Datasheet No:** DS1725W


**Parker Part No:** 940376Q

**OEM:** Fleetguard

**OEM Part No:** HF6098

### Product Dimensions

<b>A (mm)</b>	130.0	<b>(inch)</b>	5.12
<b>B (mm)</b>	85.0	<b>(inch)</b>	3.35
<b>C (mm)</b>	85.0	<b>(inch)</b>	3.35
<b>D (mm)</b>	130.0	<b>(inch)</b>	5.12
<b>E (mm)</b>	225.0	<b>(inch)</b>	8.86

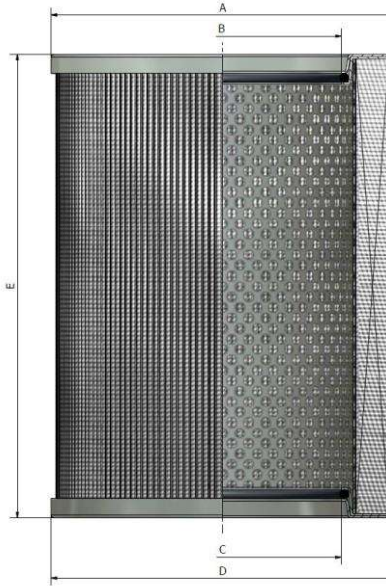

### Construction Materials

<b>Seal(s):</b>	Other
<b>Top Endcap:</b>	Mild steel tin plated
<b>Bottom Endcap:</b>	Mild steel tin plated
<b>Inner Support Cylinder:</b>	Mild steel tin plated
<b>Filter Media:</b>	Single layer cellulose (paper) with coated mesh on both sides

### Calculated Performance Criteria

<b>Differential Pressure (<math>\Delta p</math>):</b>	bar @ l/min
<b>Tested to ISO3968 @ 32 cSt</b>	psi @ gpm
<b>Efficiency:</b>	>Beta 200 @ 25 (nominal) microns & great >Beta 1000 @ microns & greater
<b>Minimum Collapse Pressure:</b>	>10 bar
<b>Tested to ISO2941</b>	>145 psi
<b>Dirt Holding Capacity acc. to ISO16889</b>	61.5 gram @ bar terminal pressure drop 61.5 gram @ psi terminal pressure drop