

## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

**Creation Date:** 17-12-2018

**Datasheet No:** DS951W


**Parker Part No:** PR4465

**OEM:** Argo

**OEM Part No:** P2.1217-12

### Product Dimensions

<b>A (mm)</b>	118.0	<b>(inch)</b>	4.65
<b>B (mm)</b>	59.5	<b>(inch)</b>	2.34
<b>C (mm)</b>	59.5	<b>(inch)</b>	2.34
<b>D (mm)</b>	118.0	<b>(inch)</b>	4.65
<b>E (mm)</b>	166.0	<b>(inch)</b>	6.54

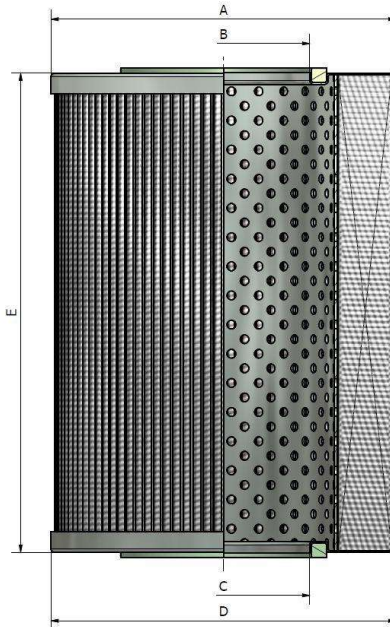

### Construction Materials

<b>Seal(s):</b>	FPM: Fluoroelastomer
<b>Top Endcap:</b>	Mild steel zinc plated
<b>Bottom Endcap:</b>	Mild steel zinc plated
<b>Inner Support Cylinder:</b>	Mild steel zinc plated
<b>Outer Support Cylinder:</b>	Mild steel tin plated
<b>Filter Media:</b>	Single layer cellulose (paper) with coated mesh on both sides

### Calculated Performance Criteria

<b>Differential Pressure (<math>\Delta p</math>):</b>	0.28 bar @ 500 l/min
<b>Tested to ISO3968 @ 32 cSt</b>	4.08 psi @ 109.98 gp
<b>Efficiency:</b>	>Beta 200 @ N/A microns & greater >Beta 1000 @ N/A microns & greater
<b>Minimum Collapse Pressure:</b>	>10 bar
<b>Tested to ISO2941</b>	>145 psi
<b>Dirt Holding Capacity acc. to ISO16889</b>	43.5 gram @ 4 bar terminal pressure drop 43.5 gram @ 58 psi terminal pressure drop