

Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS957W


Parker Part No: PR4468

OEM: Argo

OEM Part No: V2.1217-36

Product Dimensions

A (mm)	118.0	(inch)	4.65
B (mm)	59.5	(inch)	2.34
C (mm)	59.5	(inch)	2.34
D (mm)	118.0	(inch)	4.65
E (mm)	166.0	(inch)	6.54

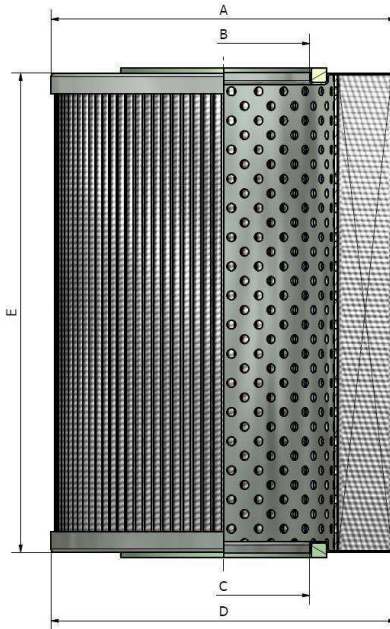

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel zinc plated
Bottom Endcap:	Mild steel zinc plated
Inner Support Cylinder:	Mild steel zinc plated
Outer Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0.47 bar @ 600 l/min
Tested to ISO3968 @ 32 cSt	6.82 psi @ 131.98 gp
Efficiency:	>Beta 200 @ 10 microns & greater >Beta 1000 @ 12 microns & greater
Minimum Collapse Pressure:	>10 bar
Tested to ISO2941	>145 psi
Dirt Holding Capacity acc. to ISO16889	33.5 gram @ 4 bar terminal pressure drop 33.5 gram @ 58 psi terminal pressure drop