

Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS115W

Parker Part No: 927723Q

OEM: Pall

OEM Part No: HC9021FKP8H&Z


Product Dimensions

A (mm) 45.5 **(inch)** 1.79

B (mm) 25.8 **(inch)** 1.02

D (mm) 45.5 **(inch)** 1.79

E (mm) 208.0 **(inch)** 8.19

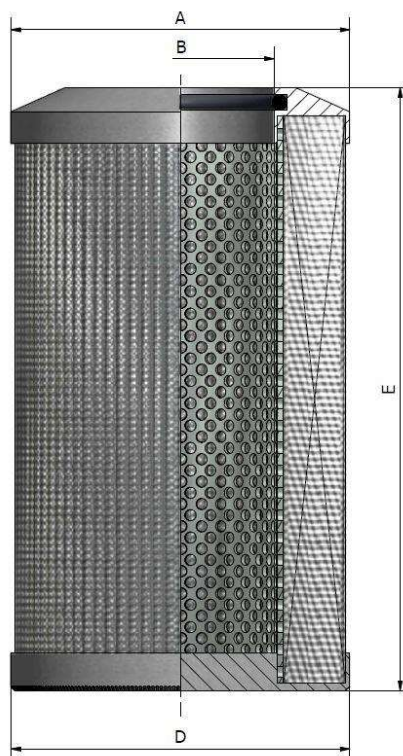

Construction Materials

Seal(s): FPM: Fluoroelastomer

Top Endcap: Steel tin plated

Bottom Endcap: Steel tin plated

Inner Support Cylinder: Mild steel tin plated

Filter Media: Multilayer fibreglass with coated mesh on the inflow side and stainless steel mesh on the outlet side

Calculated Performance Criteria

Differential Pressure (Δp): 0.51 bar @ 15 l/min

Tested to ISO3968 @ 32 cSt 7.40 psi @ 3.30 gpm

Efficiency: >Beta 200 @ N/A microns & greater
>Beta 1000 @ 4.5 microns & greater

Minimum Collapse Pressure: >210 bar

Tested to ISO2941 >3046 psi

Dirt Holding Capacity acc. to ISO16889

>15.5 gram @ 7 bar terminal pressure drop

>15.5 gram @ 102 psi terminal pressure drop