


## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

<b>Creation Date:</b>	17-12-2018
<b>Datasheet No:</b>	DS326W
<b>Parker Part No:</b>	937200Q
<b>OEM:</b>	Pall
<b>OEM Part No:</b>	HC9604FKP8H&Z

### Product Dimensions

<b>A (mm)</b>	79.0	<b>(inch)</b>	3.11
<b>B (mm)</b>	51.0	<b>(inch)</b>	2.01
<b>D (mm)</b>	79.0	<b>(inch)</b>	3.11
<b>E (mm)</b>	202.0	<b>(inch)</b>	7.95
<b>H (mm)</b>	16.0	<b>(inch)</b>	0.63

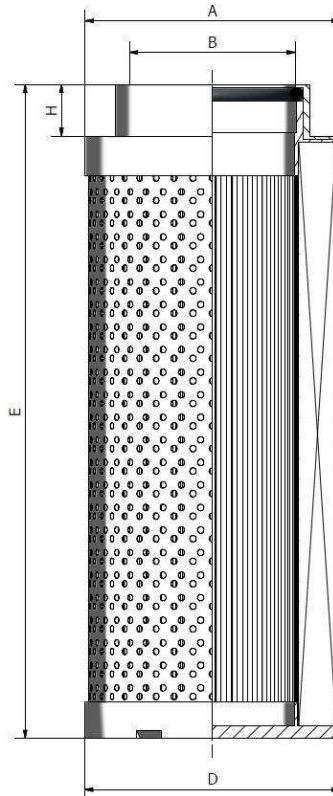

### Construction Materials

<b>Seal(s):</b>	FPM: Fluoroelastomer
<b>Top Endcap:</b>	Glass reinforced nylon
<b>Bottom Endcap:</b>	Glass reinforced nylon
<b>Filter Media:</b>	Multilayer fibreglass with coated mesh on both sides

### Calculated Performance Criteria

<b>Differential Pressure (<math>\Delta p</math>):</b>	0.43 bar @ 100 l/min
<b>Tested to ISO3968 @ 32 cSt</b>	6.29 psi @ 22.00 gpm
<b>Efficiency:</b>	>Beta 200 @ N/A microns & greater >Beta 1000 @ 4.5 microns & greater
<b>Minimum Collapse Pressure:</b>	>10 bar
<b>Tested to ISO2941</b>	>145 psi
<b>Dirt Holding Capacity acc. to ISO16889</b>	29.0 gram @ 4 bar terminal pressure drop 29.0 gram @ 58 psi terminal pressure drop