


## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

|                        |              |
|------------------------|--------------|
| <b>Creation Date:</b>  | 17-12-2018   |
| <b>Datasheet No:</b>   | DS1710W      |
| <b>Parker Part No:</b> | 940386Q      |
| <b>OEM:</b>            | Pall         |
| <b>OEM Part No:</b>    | HC8314FKP13H |

### Product Dimensions

|               |       |               |       |
|---------------|-------|---------------|-------|
| <b>A (mm)</b> | 154.5 | <b>(inch)</b> | 6.08  |
| <b>B (mm)</b> | 95.0  | <b>(inch)</b> | 3.74  |
| <b>C (mm)</b> | 98.5  | <b>(inch)</b> | 3.88  |
| <b>D (mm)</b> | 154.5 | <b>(inch)</b> | 6.08  |
| <b>E (mm)</b> | 270.0 | <b>(inch)</b> | 10.63 |

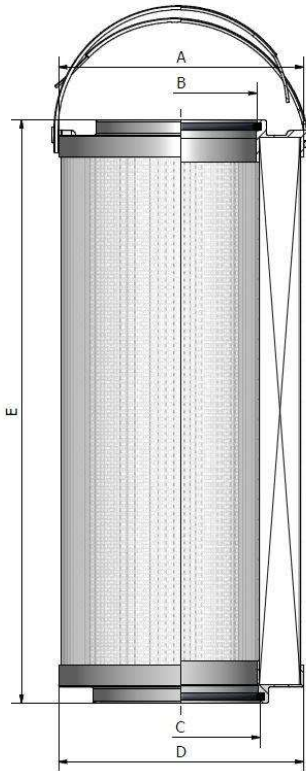

### Construction Materials

|                       |                                                      |
|-----------------------|------------------------------------------------------|
| <b>Seal(s):</b>       | FPM: Fluoroelastomer                                 |
| <b>Top Endcap:</b>    | Glass reinforced nylon                               |
| <b>Bottom Endcap:</b> | Glass reinforced nylon                               |
| <b>Filter Media:</b>  | Multilayer fibreglass with coated mesh on both sides |

### Calculated Performance Criteria

|                                                       |                                                                         |
|-------------------------------------------------------|-------------------------------------------------------------------------|
| <b>Differential Pressure (<math>\Delta p</math>):</b> | bar @ l/min                                                             |
| <b>Tested to ISO3968 @ 32 cSt</b>                     | psi @ gpm                                                               |
| <b>Efficiency:</b>                                    | >Beta 200 @ N/A microns & greater<br>>Beta 1000 @ 4.5 microns & greater |
| <b>Minimum Collapse Pressure:</b>                     | >10 bar                                                                 |
| <b>Tested to ISO2941</b>                              | >145 psi                                                                |
| <b>Dirt Holding Capacity acc. to ISO16889</b>         |                                                                         |