


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	17-12-2018
Datasheet No:	DS051W
Parker Part No:	933228Q
OEM:	Pall
OEM Part No:	HC8400FKS26H&Z

Product Dimensions

A (mm)	153.0	(inch)	6.02
B (mm)	83.4	(inch)	3.28
C (mm)	83.4	(inch)	3.28
D (mm)	153.0	(inch)	6.02
E (mm)	650.5	(inch)	25.61

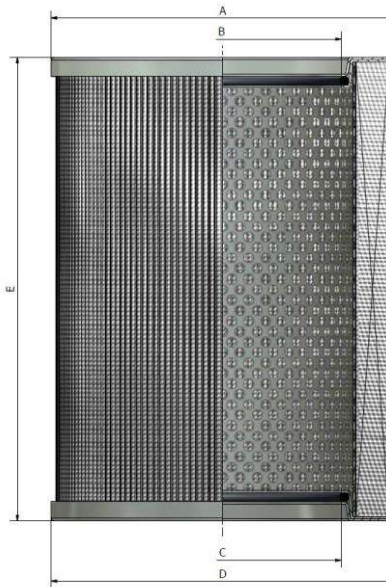

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Mild steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0.32 bar @ 680 l/min
Tested to ISO3968 @ 32 cSt	4.64 psi @ 149.58 gp
Efficiency:	>Beta 200 @ 10 microns & greater >Beta 1000 @ 12 microns & greater
Minimum Collapse Pressure:	>10 bar
Tested to ISO2941	>145 psi
Dirt Holding Capacity acc. to ISO16889	>142.0 gram @ 4 bar terminal pressure drop >142.0 gram @ 58 psi terminal pressure drop