

Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS1034W

Parker Part No: 943730Q

OEM: MP Filtri

OEM Part No: MF4001A25HV&B



Product Dimensions

A (mm) 130.0 **(inch)** 5.12

C (mm) 51.5 **(inch)** 2.03

D (mm) 130.0 **(inch)** 5.12

E (mm) 145.0 **(inch)** 5.71

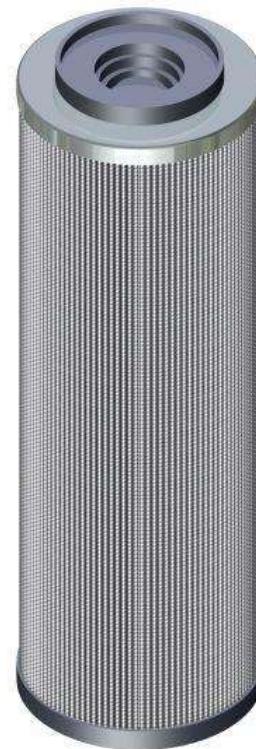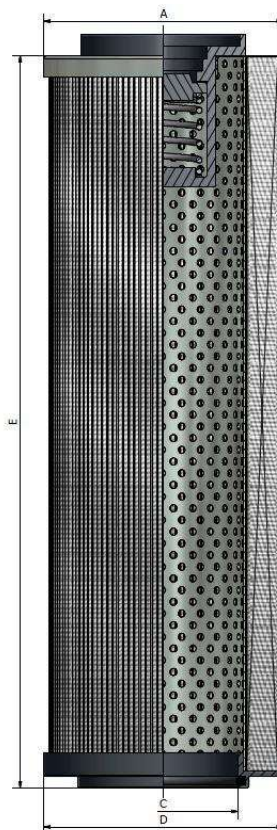

Construction Materials

Seal(s): FPM: Fluoroelastomer

Top Endcap: Glass reinforced nylon

Bottom Endcap: Glass reinforced nylon

Inner Support Cylinder: Mild steel tin plated

Filter Media: Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp): 0.43 bar @ 400 l/min
Tested to ISO3968 @ 32 cSt 6.24 psi @ 87.99 gpm

Efficiency: >Beta 200 @ 20 microns & greater
 >Beta 1000 @ 22 microns & greater

Minimum Collapse Pressure: >10 bar

Tested to ISO2941 >145 psi

Dirt Holding Capacity acc. to ISO16889

>22.6 gram @ 4 bar terminal pressure drop

>22.6 gram @ 58 psi terminal pressure drop