


Bulkhead Male Connector SMCB

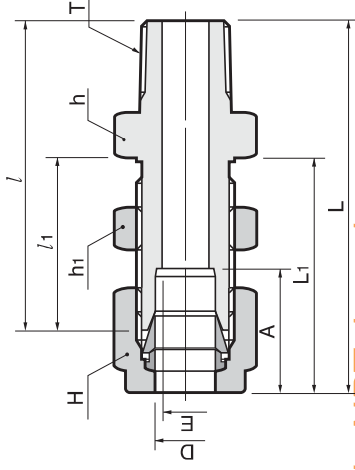

Connects fractional tube to female NPT thread

Part No.	Tube O.D.		T (NPT)	E Min.	Width across flat						A	l	l1	L	L1	Panel Hole Drill size	Panel Max Thickness
	in	mm			h	h1	h	h1	H	H							
SMCB - 2-2N	1/8	3.17	1/8	2.28	1/2	12.70	12.70	1/2	12.70	7/16	11.11	39.87	24.63	46.48	31.24	8.33	12.70
SMCB - 4-2N	1/4	6.35	1/8	4.82	5/8	15.87	15.87	5/8	15.87	9/16	14.28	42.16	26.16	49.53	33.52	11.50	10.16
SMCB - 4-4N	1/4	6.35	1/4	4.82	5/8	15.87	15.87	5/8	15.87	9/16	14.28	45.97	26.16	53.34	33.52	11.50	10.16
SMCB - 6-4N	3/8	9.52	1/4	7.11	3/4	19.05	19.05	3/4	19.05	11/16	17.46	50.03	29.46	57.40	36.83	14.68	11.17
SMCB - 6-6N	3/8	9.52	3/8	7.11	3/4	19.05	19.05	3/4	19.05	11/16	17.46	50.03	29.46	57.40	36.83	14.68	11.17
SMCB - 6-8N	3/8	9.52	1/2	7.11	7/8	22.22	22.22	3/4	19.05	11/16	17.46	56.38	29.46	63.75	36.83	14.68	11.17
SMCB - 8-6N	1/2	12.70	3/8	9.39	15/16	23.81	23.81	15/16	23.81	7/8	22.22	53.08	31.75	63.24	41.91	19.44	12.70
SMCB - 8-8N	1/2	12.70	1/2	10.41	15/16	23.81	23.81	15/16	23.81	7/8	22.22	58.67	31.75	68.83	41.91	19.44	12.70
SMCB-12-12N	3/4	19.05	3/4	15.74	1-3/16	30.16	30.16	1-3/16	30.16	1-1/8	28.58	66.04	37.33	76.20	47.49	25.76	16.76
SMCB-16-16N	1	25.40	1	22.35	1-5/8	41.28	41.28	1-5/8	41.28	1-1/2	38.10	81.02	45.21	93.21	57.40	33.73	19.05
SMCB-20-20N	1-1/4	31.75	1-1/4	27.68	1-7/8	47.63	47.63	1-7/8	47.63	1-7/8	47.63	85.97	47.75	108.07	69.85	41.67	19.05
SMCB-24-24N	1-1/2	38.10	1-1/2	34.03	2-1/4	57.15	57.15	2-1/4	57.15	2-1/4	57.15	93.03	49.27	120.21	76.45	49.61	19.05
SMCB-32-32N	2	50.80	2	45.97	2-3/4	69.85	69.85	2-3/4	69.85	3	76.20	107.29	56.38	144.62	93.71	16.27	19.05