

Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS105W

Parker Part No: 925582Q

OEM: Pall

OEM Part No: HC9020FKP4H&Z


Product Dimensions

A (mm) 45.5 **(inch)** 1.79

B (mm) 25.8 **(inch)** 1.02

D (mm) 45.5 **(inch)** 1.79

E (mm) 112.5 **(inch)** 4.43

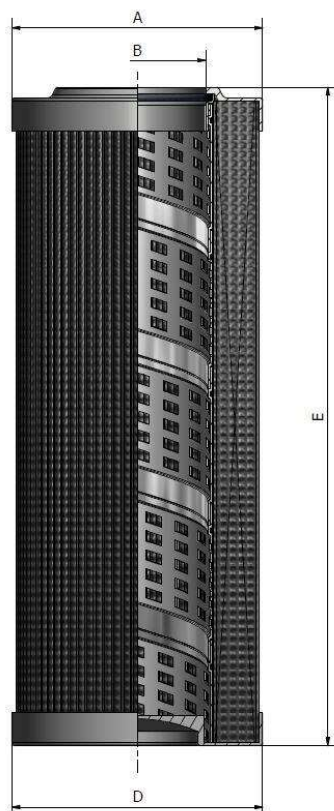

Construction Materials

Seal(s): FPM: Fluoroelastomer

Top Endcap: Glass reinforced nylon or mil

Bottom Endcap: Glass reinforced nylon or mil

Inner Support Cylinder: Mild steel tin plated

Filter Media: Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp): 0.01 bar @ 10 l/min

Tested to ISO3968 @ 32 cSt 0.16 psi @ 2.20 gpm

Efficiency: >Beta 200 @ N/A microns & greater
>Beta 1000 @ 4.5 microns & greater

Minimum Collapse Pressure: >20 bar

Tested to ISO2941 >290 psi

Dirt Holding Capacity acc. to ISO16889

>10.3 gram @ 7 bar terminal pressure drop

>10.3 gram @ 102 psi terminal pressure drop